

FULLY UV STABLE CHIP SYSTEM

After continued testing we have confirmed our Cyclospartic Topcoat has much better adhesion to concrete than traditional polyaspartic coatings. The results were significant enough that we are happy to announce a new option for outdoor applications.

Cyclospartic Topcoat may now be tinted and used as a basecoat for chip systems where use is limited to foot traffic such as patios, porches and walkways.

Cyclospartic Topcoat


@125-175 sq/ft per gallon

Chip Broadcast

@5 sq/ft per pound

Cyclospartic Topcoat

@250-350 sq/ft per gallon

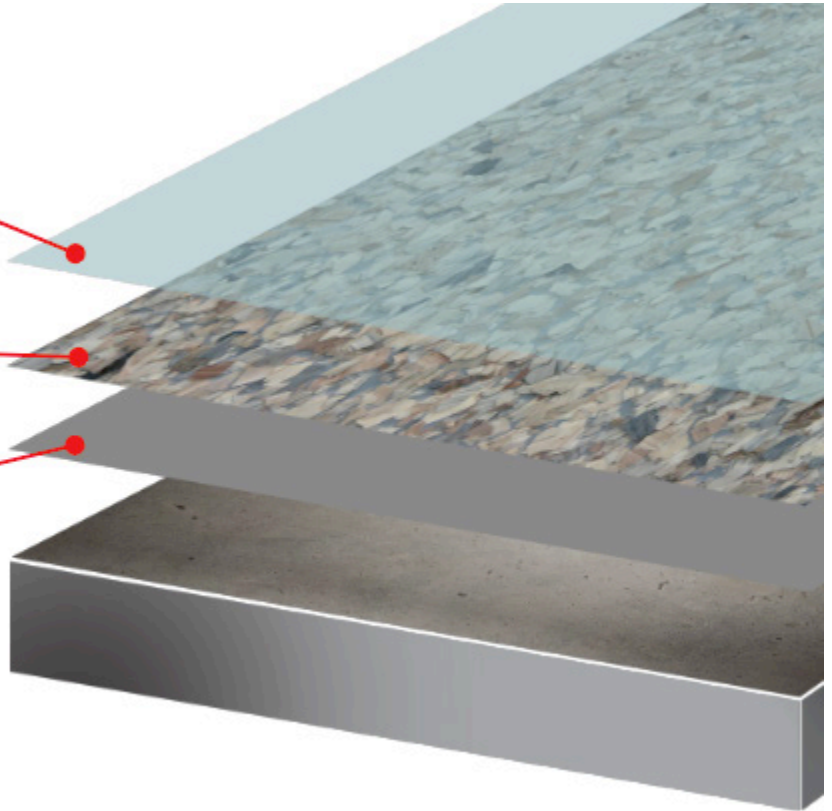

As with any system it has limitations:

- Mechanical prep to CSP 3 is required
- If concrete is hard troweled or very smooth use of Anchor Coat as a primer may be required.
- Not for commercial use.

Contact technicalservices@garageforce.com for any questions or concerns